
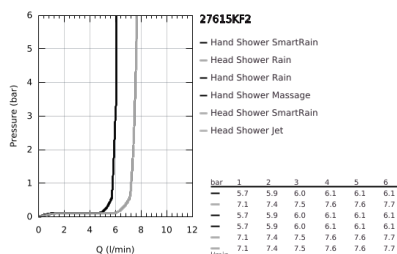


27 615 KF2 EUPHORIA SYSTEM 260 SHOWER SYSTEM WITH THERMOSTATIC MIXER FOR WALL MOUNTING

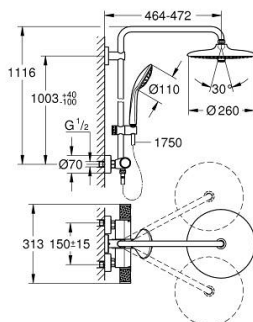

PRODUCT DESCRIPTION

- Colour: phantom black
- consisting of:
 - horizontal swivable 450 mm projection shower arm
 - exposed thermostatic shower with Aquadimmer function
 - allows change between:
 - head shower Euphoria 260
 - 3 spray patterns:
 - Rain, SmartRain, Jet
 - maximum flow rate (at 3 bar): 7.5 l/min
 - with ball joint
 - rotation angle $\pm 15^\circ$
 - hand shower Euphoria 110 Massage
 - 3 spray patterns:
 - Rain, Massage, SmartRain
 - maximum flow rate (at 3 bar): 8.5 l/min
 - adjustable height via gliding element
 - Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388 000)
 - GROHE TurboStat compact cartridge with wax thermoelement
 - GROHE SafeStop safety button at 38°C (calibration required)
 - GROHE SafeStop Plus optional temperature limiter at 43°C included
 - GROHE CoolTouch prevents scalding on hot surfaces
 - GROHE ProGrip with knurl structure
 - GROHE Water Saving - Less water, perfect flow
 - GROHE DreamSpray perfect spray pattern
 - GROHE SprayDimmer (Stepless flow rate reduction)
 - GROHE FastFixation upper bracket adjustable
 - Inner WaterGuide for a longer life
 - SpeedClean anti-limescale system
 - TwistStop preventing the hose from twisting
 - suitable for instantaneous heaters from 18 kW/h
 - minimum flow rate 7 l/min.
 - optional upgrade: GROHE EasyReach tray (26 362), sold separately
 - professional edition