



35 500 000 GROHE RAPIDO T THERMOSTATIC MIXER FOR CONCEALED INSTALLATION

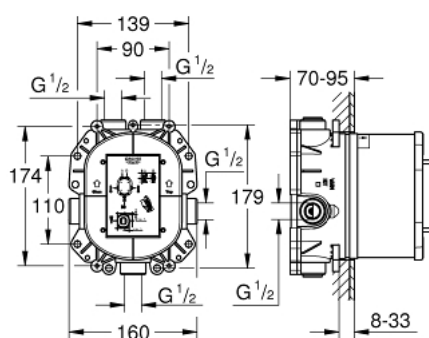

PRODUCT DESCRIPTION

- for use with Grohtherm Special and Grohtherm F
- without finishing trim set
- flat installation depth 70 mm - 95 mm
- easy to install, premounted and tested unit
- GROHE TurboStat compact cartridge with wax thermoelement
- two top outlets 1/2", lockable
- high flow rate up to 50 l/min. by use of three outlets
- bottom outlet 1/2" - can only be used with separate stopvalve
- safe to install, stable built-in-box and protective cap
- fixing options for solid walls and dry cladding
- wall sealing
- Aquadimmer-diverter for bath mixer or stopvalve for shower mixer in finishing trim set
- body of DR brass
- built-in non return valve and dirt strainers
- GROHE Water Saving - Less water, perfect flow
- min. recommended pressure 1.0 bar

35 500 000 GROHE RAPIDO T THERMOSTATIC MIXER FOR CONCEALED INSTALLATION

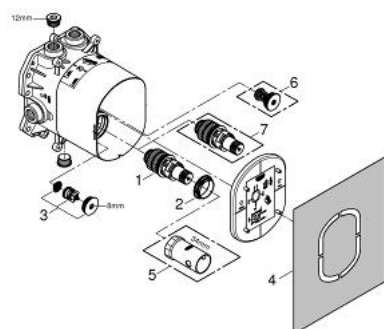

SPARE PARTS, November 2005 – now

- 1: Thermostatic compact cartridge 3/4" (Order-nr. 47483000)
- 2: retaining ring (Order-nr. 47765000)
- 3: Non-return valve (Order-nr. 47753000)
- 4: Replacement kit for seal (Order-nr. 48263000)
- 5: Socket spanner (Order-nr. 19332000)*
- 6: Safety combination (EN 1717) (Order-nr. 29007000)*
- 7: Thermostatic compact cartridge 3/4" for reversed supplies, left:cold/right:hot (Order-nr. 47186000)*

*Special accessories