


38 987 000 WC CONCEALED CISTERN

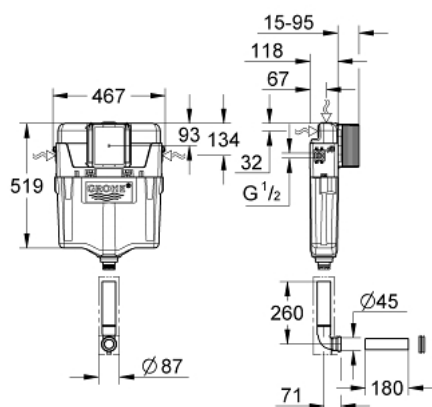

PRODUCT DESCRIPTION

- 6 l / 3 l
- factory set 6 l and 3 l
- pneumatic discharge valve offering 2 modes of operation: dual flush or single flush
- connection from left/right/back or top
- low noise (group I acc. to German Noise Specification)
- insulated against condensation
- ½" water supply connection including integrated angle valve and push fit flexible hose union
- no tools required for the installation of the inspection shaft including protection during construction phase
- inspection shaft for vertical or horizontal use allows for flush plate to be installed vertically or horizontally.
- flush pipe insulated against condensation
- fixing brackets
- without wall plate/actuation
- GROHE Water Saving - Less water, perfect flow
- flush pipe and connector
- for mounting of small flush plates please order revision shaft 40 911 000 (sold separately)